

Figure 1 is a perspective view of a circular device 10. The device 10 is mounted on a rectangular base 11. The base 11 has a raised rim 12 and a lower section 13. The device 10 consists of a central hub 15 with radial spokes 17. The outer ring 16 is divided into segments 16A and 16B. A label 14 points to the side of the device.

FIG.2B

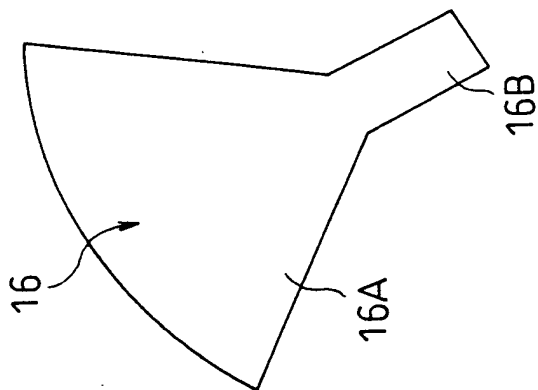


FIG.2A

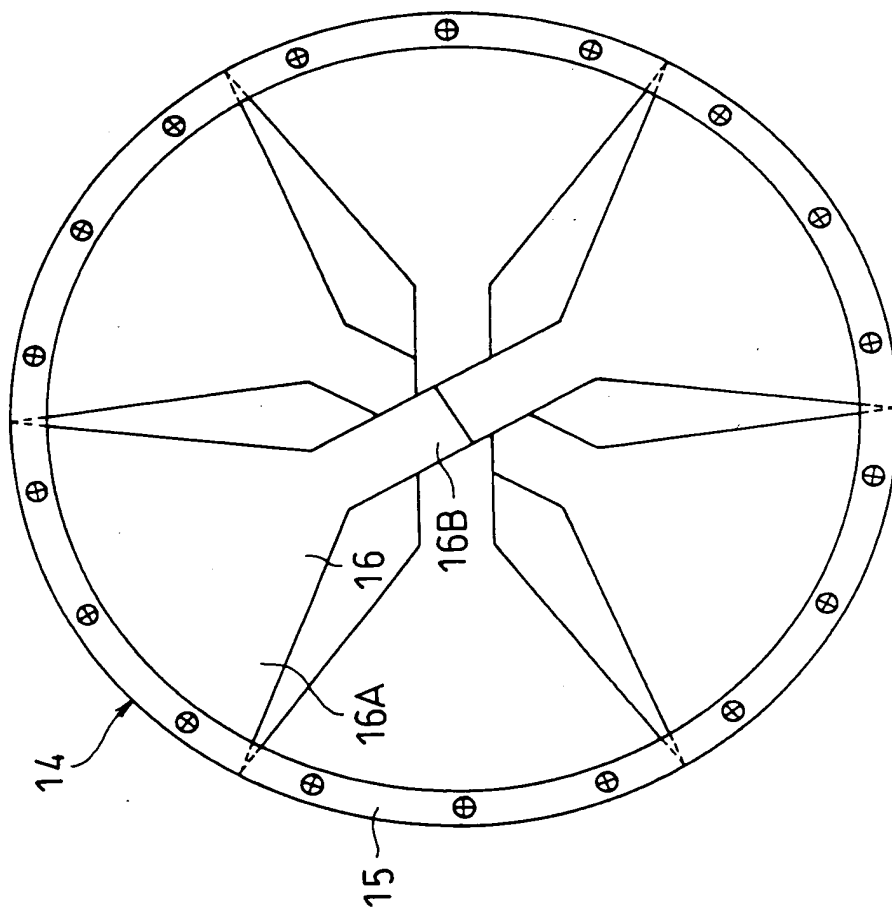


FIG. 3A

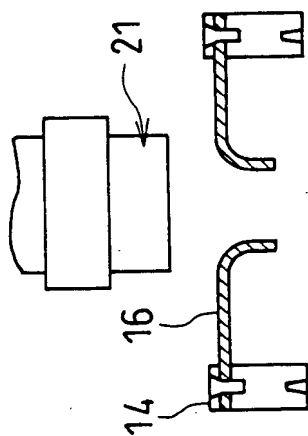


FIG. 3B

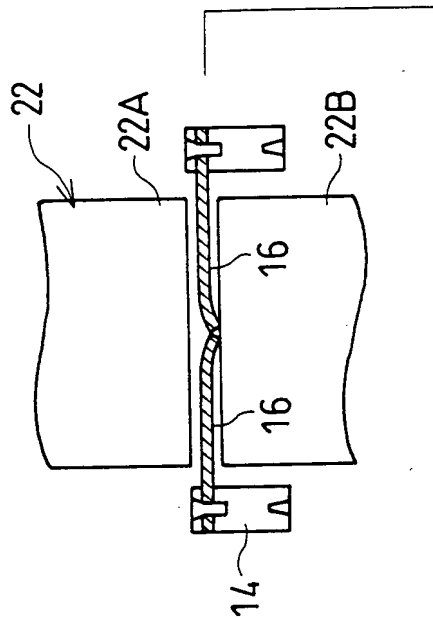


FIG. 3C

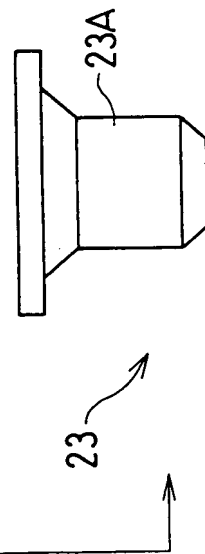


FIG. 3D

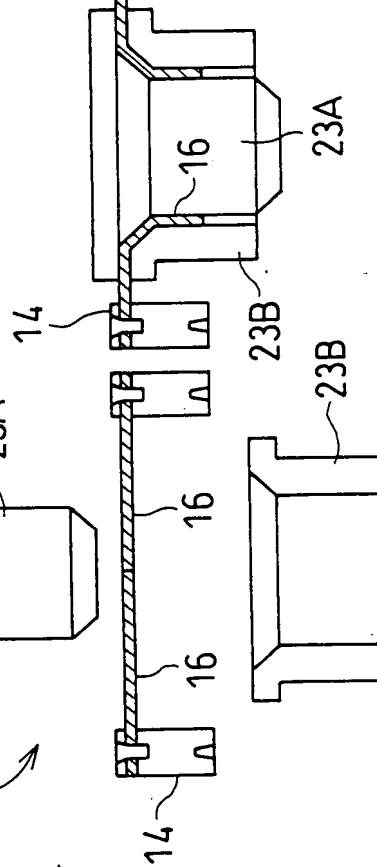


FIG. 3E

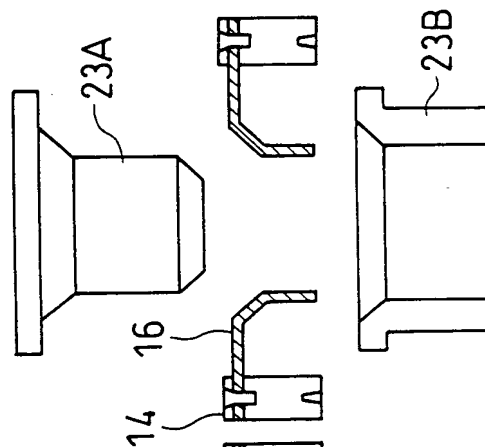


FIG. 4

